

OmniBase Tilt & Flush Mounts



Versatility for any application



Single design to accommodate a wide variety of roof types



Fewer parts required for maximum adjustability



Alignment marks easily facilitate locating layout points



Universal tool installation using a standard 1/2" socket


Start Installing the OmniBase Today!

SnapNrack Ultra Rail OmniBase Solutions

provide the ultimate flexibility in roof type, structural member and mounting configurations with a single base. Standoff attachments are engineered to ensure maximum adjustability for a clean, level installation on the most irregular roof surfaces.

Universal OmniBase

- Works with a single lag for traditional rafter mount installations
- Accommodates 2 or 4 lags for flat rafters TJI joists or metal framing.
- Can be used with 6 screws for rafter-less mounting
- Sealant Pockets allow for extra sealant around fastener
- Compatible with off the shelf flashings and e-curbs
- Anti-rotation features aid in installation

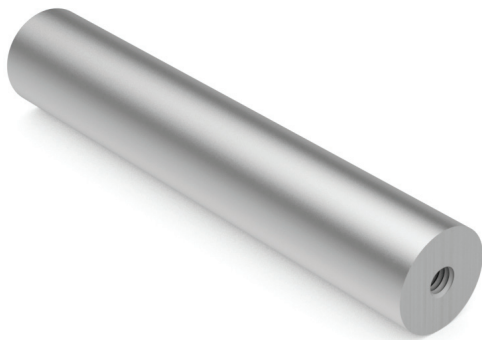

1" Post

- 5.5", 7" and 8.5" lengths available for flush mount configurations
- 5.5", 10", 14" and 23" lengths available for tilt systems accommodating both portrait & landscape orientations
- Standoff easily threads into base for attachment to any roof type

Leveling Clamp

- Clamps mount directly to SnapNrack Ultra Rail without the need for separate L Feet and mounting hardware
- Unique design offers ultimate adjustability to ensure clean, level arrays on uneven roofs
- Ships fully assembled with post and maintains the same 1/2" socket attachment throughout the system



Tilt Mount Assembly



Flush Mount Assembly

Quality. Performance. Innovation.

SnapNrack solutions are focused on simplifying the installation experience through intuitive products and the best wire management in the industry.

SnapNrack®

877-732-2860

www.snapnrack.com

contact@snapnrack.com

© 2021 by SnapNrack® Solar Mounting Solutions. All rights reserved