


MODULE HEIGHT OFF ROOF, RANGE:

MINIMUM FASTENER EDGE DISTANCE = 0.5"
MINIMUM FASTENER END DISTANCE = 2.2"

REVISION:			
1	3/10/2020	NEW DETAIL	MJA
2	6/5/2020	DIE CAST	BDP
3	7/22/2020	NAME UPDATE	MJA
4	10/2/2020	MIAMI-DADE	MJA
B	8/2/2021	DC000595	MJA



2½" MIN. EMBEDMENT
INTO WOOD MEMBER

PENETRATION DETAIL

SNAPNRACK, SPEEDSEAL
FOOT, BASE, SEALING

— COIL SPRING FOR $\frac{3}{8}$ " Ø BOLT, S.S.
OPTIONAL

— 5/16"Ø-18 X 2" BOLT,
SERRATED FLANGE, S.S.


— 5/16" WASHER, S.S.
(MAY INCLUDE NEOPRENE
TYPE GASKET)

CAVITY IN UR SPEEDSEAL FOOT IS FILLED WITH SEALANT TO ENCAPSULATE AND PROTECT THE ROOF PENETRATION FROM MOISTURE

SEALANT

ROOF DECKING

STRUCTURAL MEMBER (RAFTER)

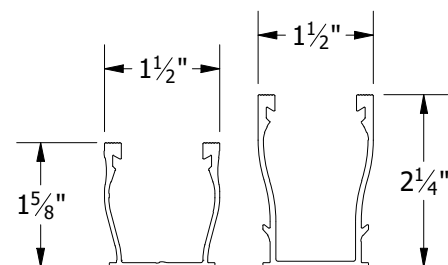

SnapNrack™

Solar Mounting Solutions

Sunrun South LLC
595 MARKET STREET, 29TH FLOOR • SAN FRANCISCO, CA 94105 USA
PHONE (415) 580-6900 • FAX (415) 580-6902

THE INFORMATION IN THIS DRAWING IS CONFIDENTIAL AND PROPRIETARY. ANY REPRODUCTION, DISCLOSURE, OR USE THEREOF IS PROHIBITED WITHOUT THE WRITTEN CONSENT OF SUNRUN SOUTH LLC.

DESIGNER: M.AFFENTRANGER
DRAFTER: M.AFFENTRANGER
APPROVED BY: B.PETERSON

SCALE:	DNS
DATE:	8/2/2021

DRAWING NUMBER:
SNR-DC-00438

DESCRIPTION:	ULTRA RAIL, ATTACHMENT DETAIL, UR SPEEDSEAL FOOT TO RAFTER
--------------	---

REV: **B**