

SNAPRACK MIGHTYMOUNT METAL-T TRACKS AND LEGS FOR MOUNTING ON FLAT OR LOW PITCH CORRUGATED METAL ROOFS


REFER TO ENGINEERING DOCUMENTATION FOR APPROVED INSTALLATION CONDITIONS AND DECK THICKNESSES

MIN. 3 FULL THREADS PROJECTING THROUGH DECK WHEN FASTENING WITH EJOT JF3-FR-2-5.5 SELF-DRILLING SCREWS OR APPROVED EQUIVALENT. USE SCREW MANUFACTURER TORQUE SPECIFICATION


REFER TO SNAPRACK INSTALLATION MANUAL FOR 5/16"Ø HARDWARE TORQUE SPECIFICATIONS

BIN: N/A

REVISION:		
A	5/24/2022	NEW DETAIL MKW

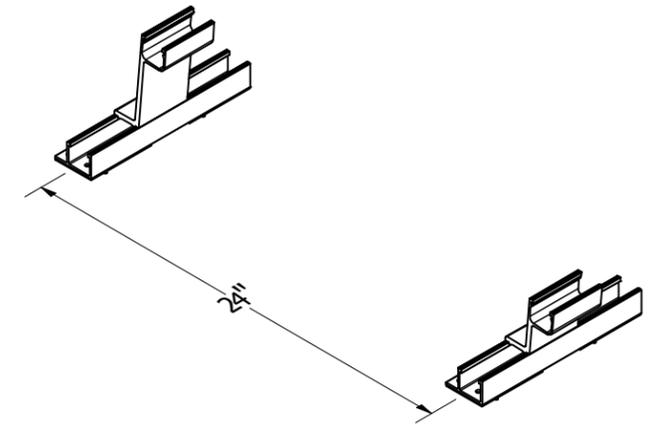

TRACKS AND LEGS SHOWN

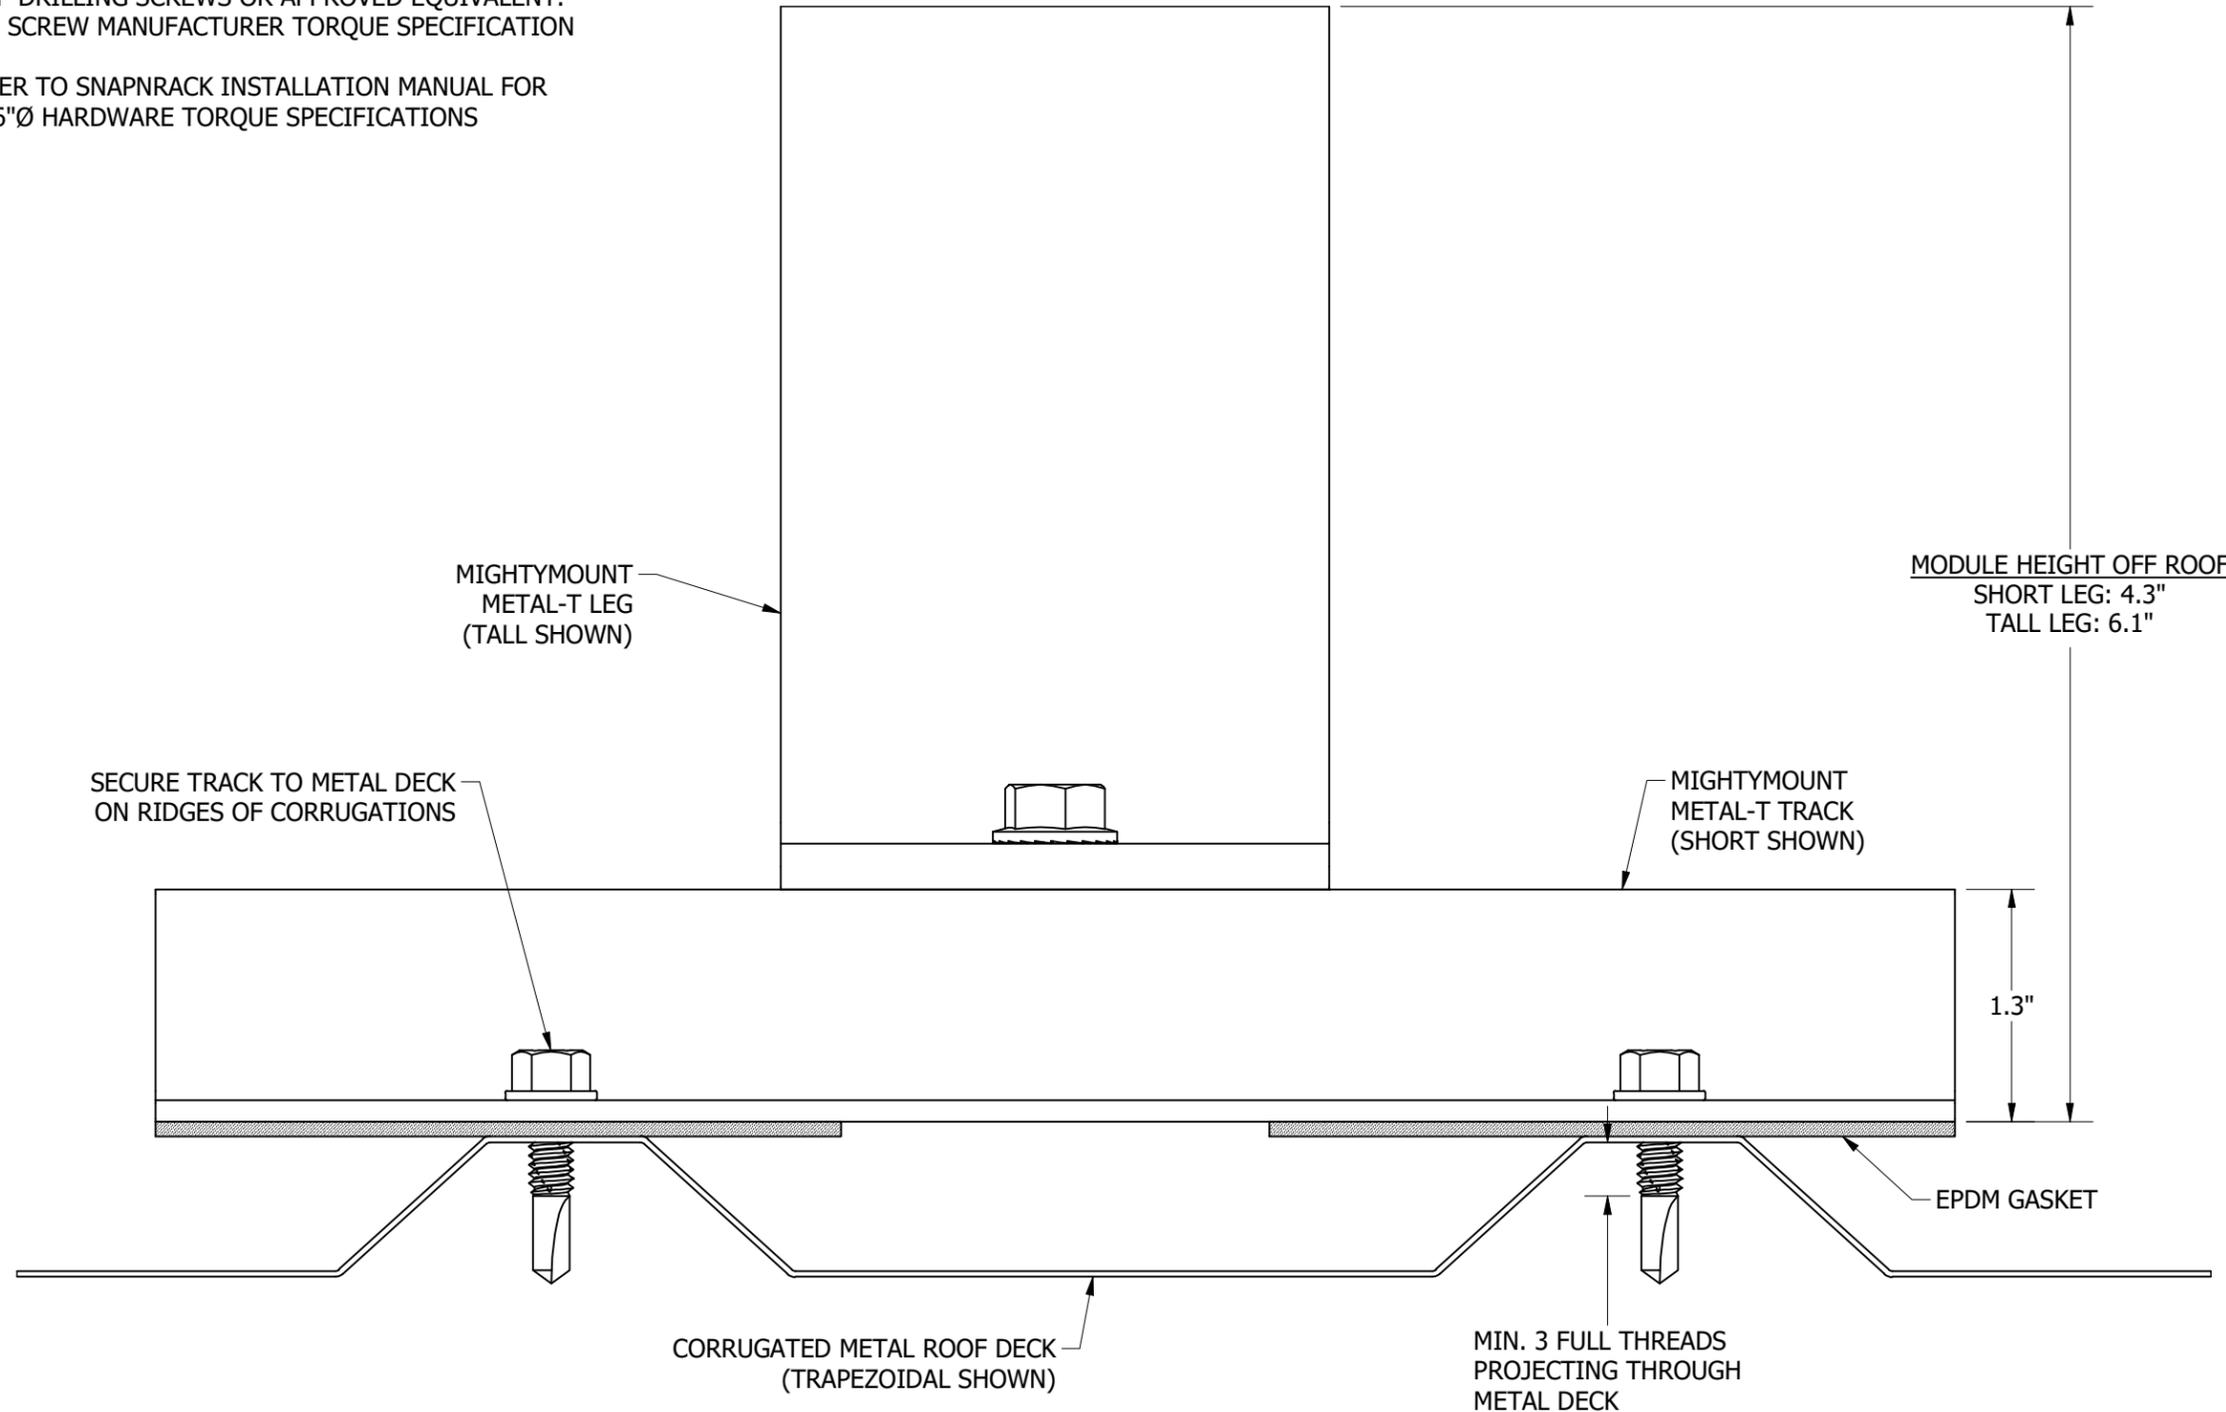

Sunrun South LLC
 595 MARKET STREET, 29TH FLOOR • SAN FRANCISCO, CA 94105 USA
 PHONE (415) 580-6900 • FAX (415) 580-6902
THE INFORMATION IN THIS DRAWING IS CONFIDENTIAL AND PROPRIETARY. ANY REPRODUCTION, DISCLOSURE, OR USE THEREOF IS PROHIBITED WITHOUT THE WRITTEN CONSENT OF SUNRUN SOUTH LLC.

DESIGNER: M.WATKINS
 DRAFTER: M.WATKINS
 APPROVED BY: B.PETERSON

SCALE: DNS
 DATE: 5/24/2022

DRAWING NUMBER: SNR-DC-00601

DESCRIPTION: MIGHTYMOUNT METAL-T, ATTACHMENT DETAIL, CORRUGATED

REV: A