

DESCRIPTION:  
**SNAPNRACK & S-5!, TDS, ALL PURPOSE L FOOT  
 WITH CORRUBRACKET (USA)**

DOC NUMBER:  
 SNR-DC-01307

**SnapNrack®**

PART NUMBER(S):

242-10040-USA

DRAWN BY:  
 M.WATKINS

REV: **B**      DATE:  
 2/18/2025


SNR SOLAR LLC

775 FIERO LANE, SUITE 200  
 SAN LUIS OBISPO, CA 93401 USA  
 EMAIL: CONTACT@SNAPNRACK.COM

THE INFORMATION IN THIS DRAWING IS CONFIDENTIAL AND PROPRIETARY. ANY REPRODUCTION, DISCLOSURE, OR USE THEREOF IS PROHIBITED WITHOUT THE WRITTEN CONSENT OF SNR SOLAR LLC.

UNITS: IN, LB, DEG [MM, KG, DEG]

SHEET: 1:2

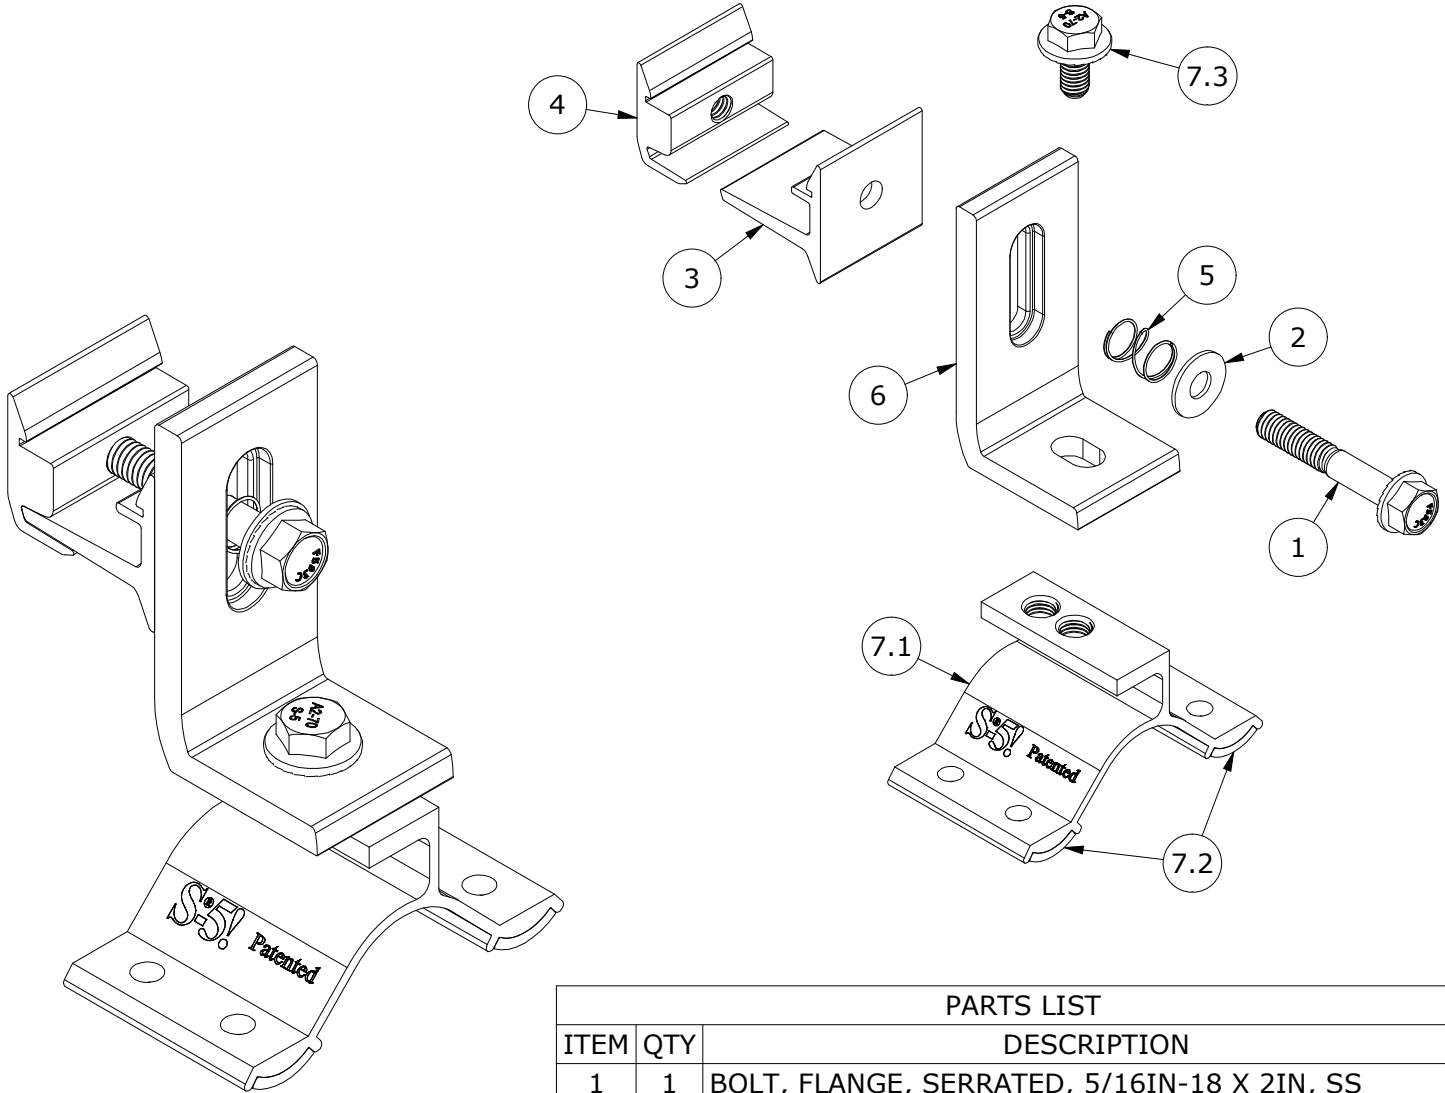

**PARTS LIST**

ITEM	QTY	DESCRIPTION
1	1	BOLT, FLANGE, SERRATED, 5/16IN-18 X 2IN, SS
2	1	5/16IN X 3/4IN SS FLAT WASHER
3	1	SNAPNRACK, ULTRA RAIL MOUNT THRU PRC, CLEAR
4	1	SNAPNRACK, ULTRA RAIL MOUNT TAPPED PRC, CLEAR
5	1	SNAPNRACK, TOPSPEED UNIVERSAL, MOUNT SPRING, SS
6	1	SNAPNRACK, AP90 L FOOT, STEPPED, SILVER
7.1	1	S-5!, EXTRUSION, CORRUBRACKET
7.2	2	S-5!, CORRUBRACKET BUTYL
7.3	1	S-5!, BOLT, SERRATED FLANGE, M8-1.25 X 16MM, SS

MATERIALS:

6000 SERIES ALUMINUM, STAINLESS STEEL

DESIGN LOAD (LBS):

VARIES, REFER TO SNAPNRACK ENGINEERING

ULTIMATE LOAD (LBS):

VARIES, REFER TO SNAPNRACK ENGINEERING

TORQUE SPECIFICATION:

12-13 FT-LBS

CERTIFICATION:

UL 2703, FILE E359313; DOMESTIC CONTENT COMPLIANT

WEIGHT (LBS):

0.62

DESCRIPTION:  
SNAPNRACK & S-5!, TDS, ALL PURPOSE L FOOT  
WITH CORRUBRACKET (USA)

DOC NUMBER:  
SNR-DC-01307

SnapNrack®

PART NUMBER(S):

242-10040-USA

DRAWN BY:  
M.WATKINS

REV:

B

DATE:

2/18/2025

SNR SOLAR LLC

775 FIERO LANE, SUITE 200  
SAN LUIS OBISPO, CA 93401 USA  
EMAIL: CONTACT@SNAPNRACK.COM

THE INFORMATION IN THIS DRAWING IS CONFIDENTIAL AND PROPRIETARY. ANY  
REPRODUCTION, DISCLOSURE, OR USE THEREOF IS PROHIBITED WITHOUT THE  
WRITTEN CONSENT OF SNR SOLAR LLC.

UNITS: IN, LB, DEG [MM, KG, DEG]

SHEET: 2:2

