

DESCRIPTION:  
SNAPNRACK & S-5!, TDS, ALL PURPOSE L FOOT  
WITH VERSABRACKET (USA)

DOC NUMBER:  
SNR-DC-01311

SnapNrack®

PART NUMBER(S):

242-10044-USA

DRAWN BY:  
M.WATKINS

REV:

B

DATE:

2/18/2025


SNR SOLAR LLC

775 FIERO LANE, SUITE 200  
SAN LUIS OBISPO, CA 93401 USA  
EMAIL: CONTACT@SNAPNRACK.COM

THE INFORMATION IN THIS DRAWING IS CONFIDENTIAL AND PROPRIETARY. ANY  
REPRODUCTION, DISCLOSURE, OR USE THEREOF IS PROHIBITED WITHOUT THE  
WRITTEN CONSENT OF SNR SOLAR LLC.

UNITS: IN, LB, DEG [MM, KG, DEG]

SHEET: 1:2

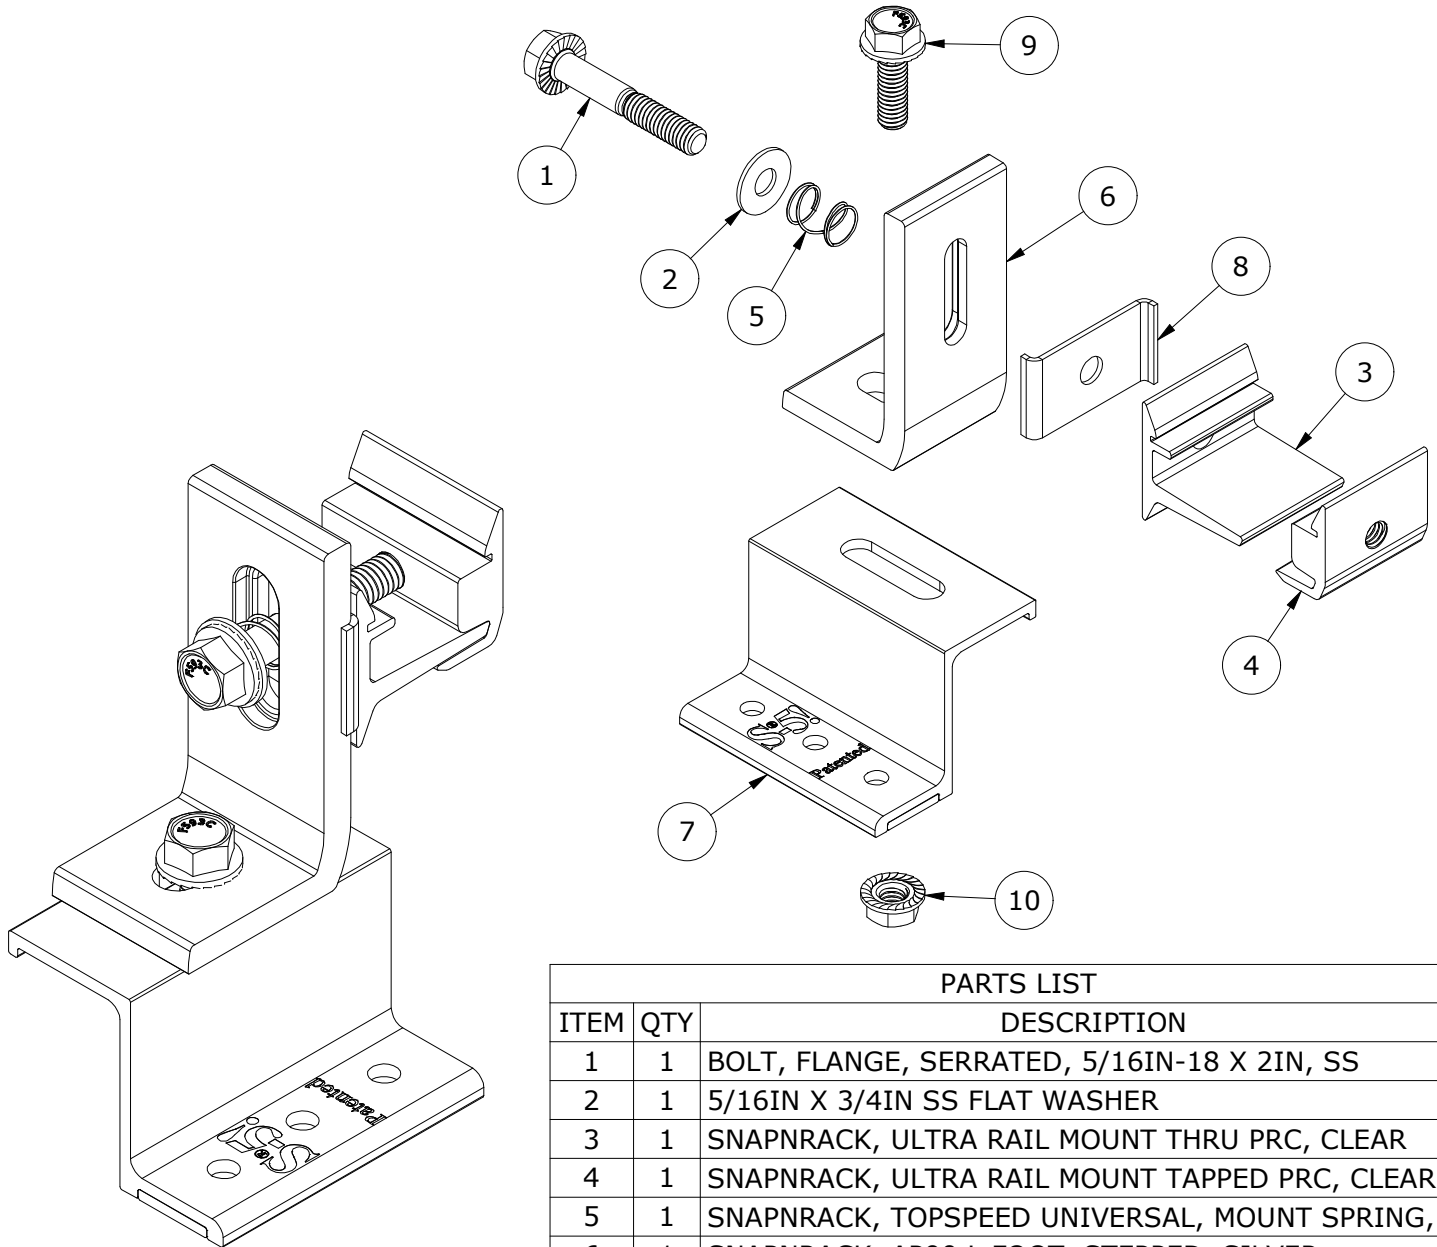

#### PARTS LIST

ITEM	QTY	DESCRIPTION
1	1	BOLT, FLANGE, SERRATED, 5/16IN-18 X 2IN, SS
2	1	5/16IN X 3/4IN SS FLAT WASHER
3	1	SNAPNRACK, ULTRA RAIL MOUNT THRU PRC, CLEAR
4	1	SNAPNRACK, ULTRA RAIL MOUNT TAPPED PRC, CLEAR
5	1	SNAPNRACK, TOPSPEED UNIVERSAL, MOUNT SPRING, SS
6	1	SNAPNRACK, AP90 L FOOT, STEPPED, SILVER
7	1	S-5! VERSABRACKET 47
8	1	SNAPNRACK, SEAM CLAMP ROTATION LOCK
9	1	BOLT, FLANGE, SERRATED, 5/16IN-18 X 1IN, SS
10	1	NUT, FLANGE, SERRATED, 5/16IN-18, SS

MATERIALS:

6000 SERIES ALUMINUM, STAINLESS STEEL

DESIGN LOAD (LBS):

VARIABLES, REFER TO SNAPNRACK ENGINEERING

ULTIMATE LOAD (LBS):

VARIABLES, REFER TO SNAPNRACK ENGINEERING

TORQUE SPECIFICATION:

12-13 FT-LBS

CERTIFICATION:

UL 2703, FILE E359313; DOMESTIC CONTENT COMPLIANT

WEIGHT (LBS):

0.61

