

DESCRIPTION:
SNAPNRACK, TDS, UR-45 RAIL (USA)

PART NUMBER(S):
232-10095-USA, 232-10096-USA

UNITS: IN, LB, DEG [MM, KG, DEG] SHEET: 1:1

DOC NUMBER:
SNR-DC-01451

DRAWN BY:
H.WULFEKOETTER



REV: **A** DATE:
11/15/2024

SnapNrack®

SNR SOLAR LLC
 775 FIERO LANE, SUITE 200
 SAN LUIS OBISPO, CA 93401 USA
 EMAIL: CONTACT@SNAPNRACK.COM

THE INFORMATION IN THIS DRAWING IS CONFIDENTIAL AND PROPRIETARY. ANY REPRODUCTION, DISCLOSURE, OR USE THEREOF IS PROHIBITED WITHOUT THE WRITTEN CONSENT OF SNR SOLAR LLC.

UR-45 RAIL PROPERTIES		
SKU	FINISH	RAIL LENGTH (X)
232-10095-USA	MILL	172 in
232-10096-USA	BLACK	172 in

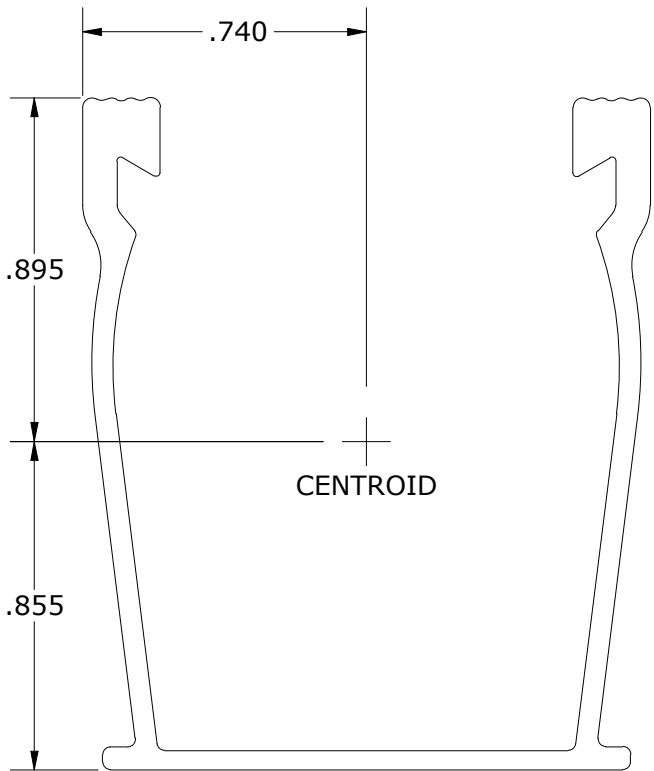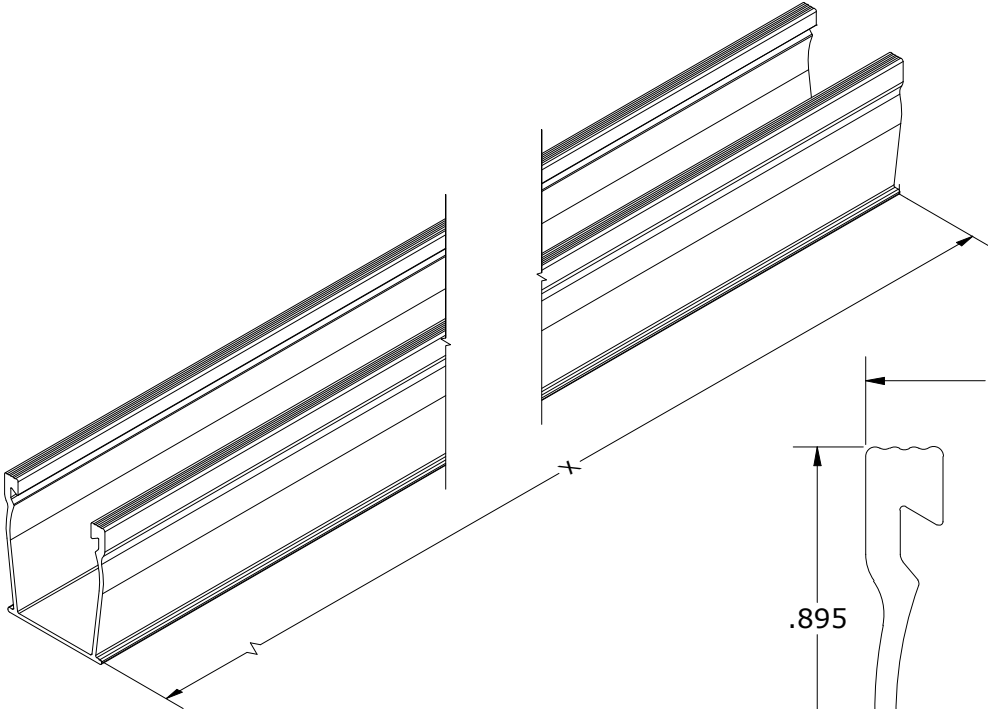

SECTION PROPERTIES	
A	0.319 in ²
I _{xx}	0.134 in ⁴
I _{yy}	0.121 in ⁴
S _x (TOP)	0.152 in ³
S _x (BOT)	0.156 in ³
S _y (LEFT)	0.164 in ³
S _y (RIGHT)	0.164 in ³

MATERIALS:	6005-T5 ALUMINUM
DESIGN LOAD (LBS):	N/A
ULTIMATE LOAD (LBS):	N/A
TORQUE SPECIFICATION:	N/A FT-LBS
CERTIFICATION:	UL 2703, FILE E359313, DOMESTIC CONTENT COMPLIANT
WEIGHT (LBS):	5.55